



REV	DESCRIPTION	SIGN	DATE
-----	-------------	------	------

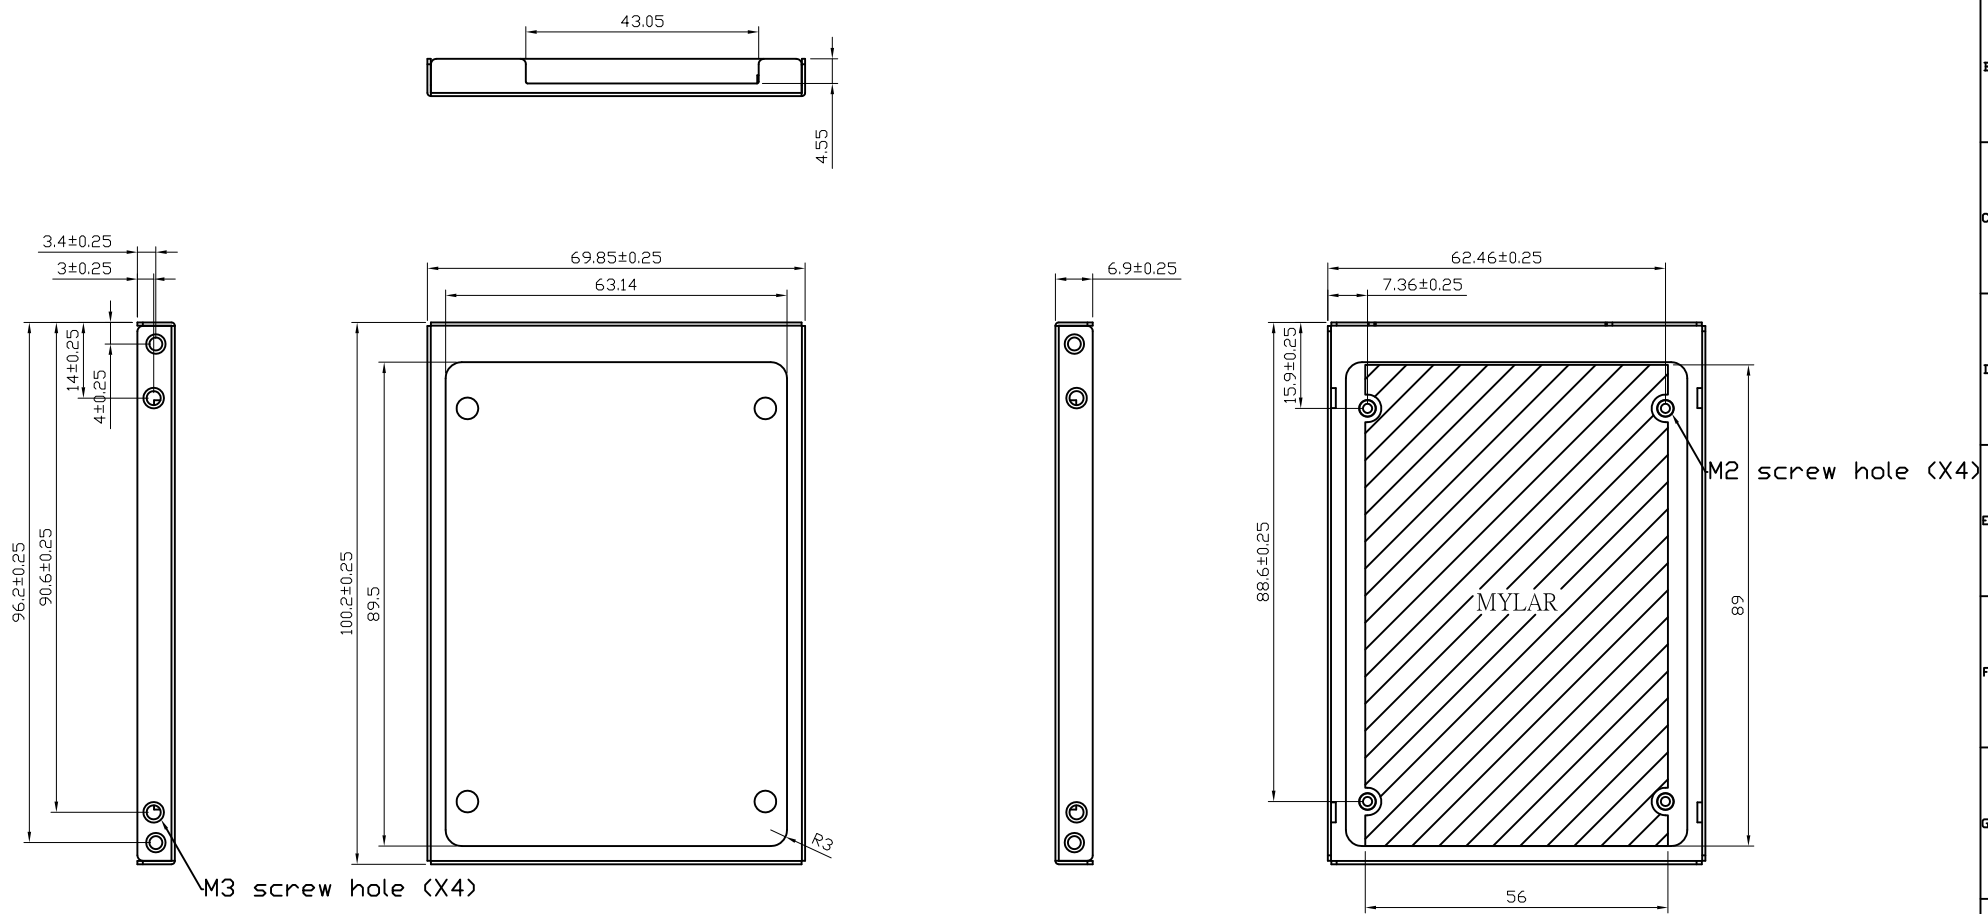


3	螺柱	M2 screw hole (X4)
2	MYLAR	PET t=0.075mm
1	TOP COVER	SECC t=0.6mm, silver painting
P/N	PART NAME	MATERIAL

TOL±	M1	M2	S1	S2	P1	P2	C	USR	MODEL	DESCRIPTION	REV	DATE	DWG NO.	SCALE	SIZE
RANGE										2.5" SSD SATA TOP ASS'Y	1.0	2013/04/26		1/1	MM
0~6	.05	0.1	0.15	0.2	.05	0.1	0.5		DATE	2013/04/26					
6~30	0.1	0.2	0.15	0.25	0.1	0.15	1		DRN	MAX					
30~80	.15	0.25	0.2	0.3	0.2	0.4	2		CKD						
80~180	.15	0.3	0.25	0.45	0.4	0.8	3		APPD						
180~315	0.2	0.5	0.4	0.6	0.6	1.2	3								
315~800	0.3	0.8	0.7	1.1	0.8	1.5	4								
ANG. TOL±	0°~30°	0.2°	30°~60°	0.5°	60°~90°	1°									

**EVERTRON**






REV	DESCRIPTION	SIGN	DATE
-----	-------------	------	------

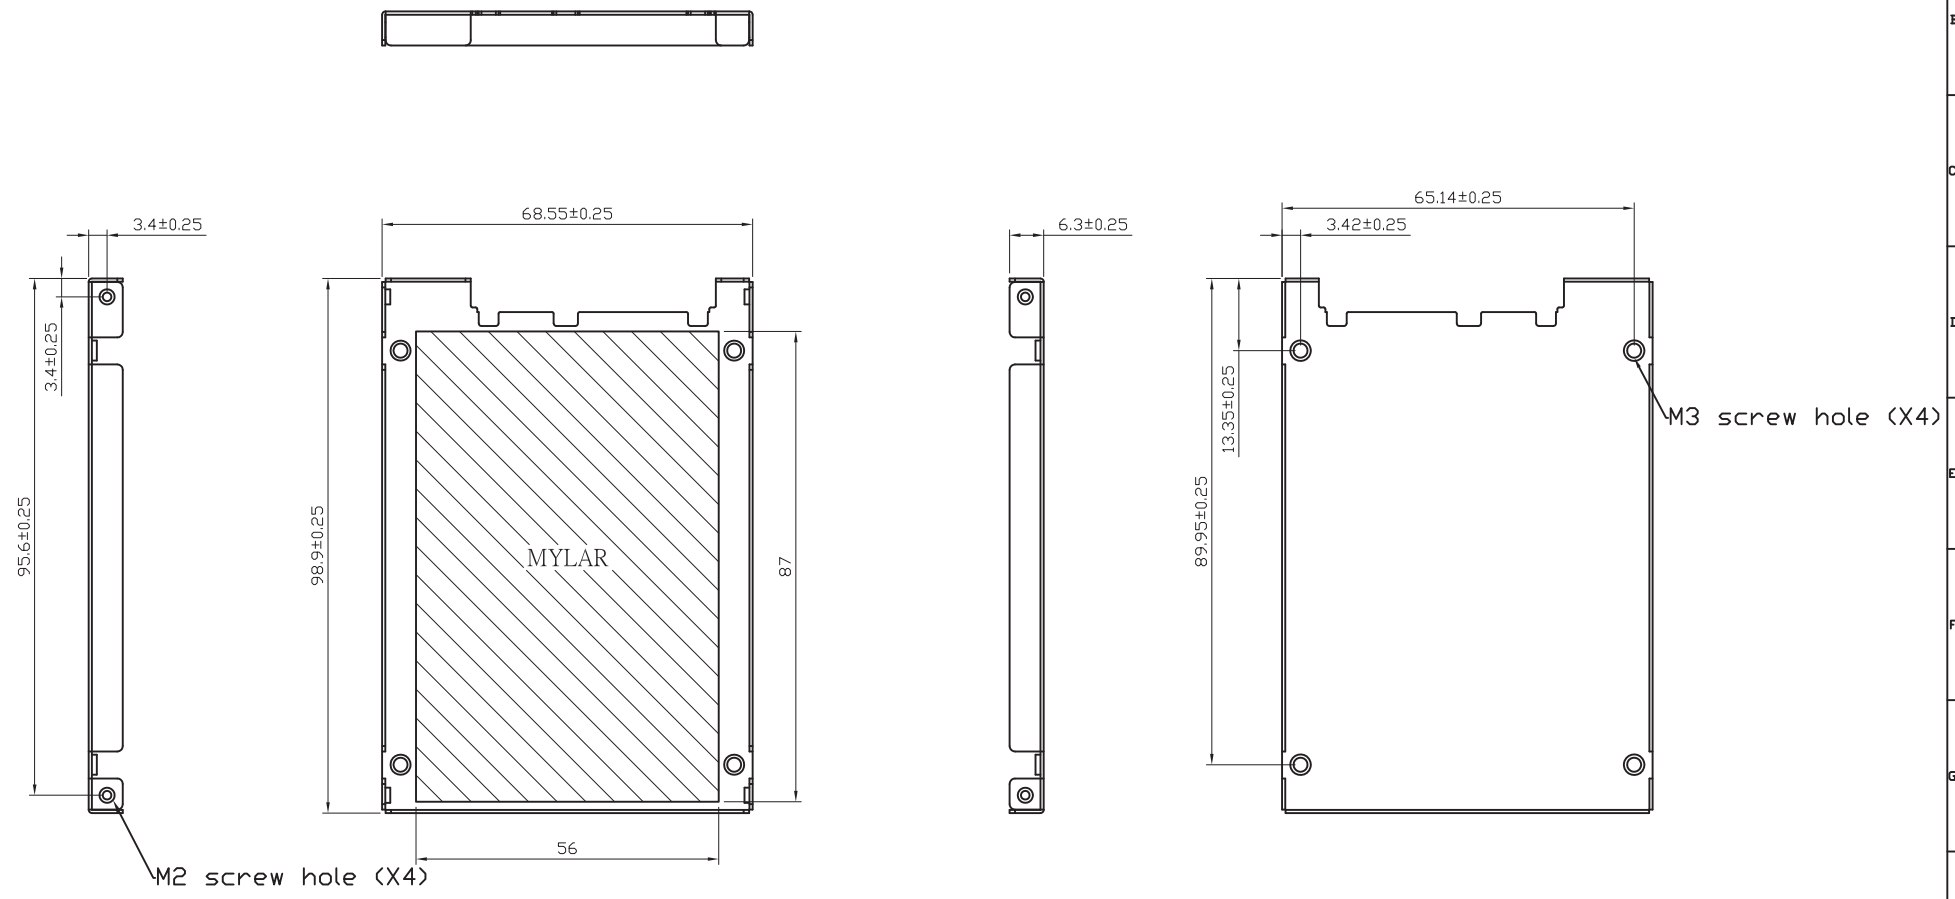

2	MYLAR	PET t=0.075mm
1	TOP COVER	SECC t=0.6mm, silver painting
P/N	PART NAME	MATERIAL

TOL±	M1	M2	S1	S2	P1	P2	C	USR	MODEL	DESCRIPTION
RANGE										2.5" SSD SATA BOT ASS'Y
0~6	.05	0.1	0.15	0.2	.05	0.1	0.5		DATE	2013/04/26
6~30	0.1	0.2	0.15	0.25	0.1	0.15	1		DWG NO.	
30~80	.15	0.25	0.2	0.3	0.2	0.4	2		DRN	MAX
80~180	.15	0.3	0.25	0.45	0.4	0.8	3		CKD	
180~315	0.2	0.5	0.4	0.6	0.6	1.2	3		P/N NO.	CASE-SATABB-02
315~800	0.3	0.8	0.7	1.1	0.8	1.5	4		REV	1.0
ANG. TOL±	0°~30°	0.2°	30°~60°	0.5°	60°~90°	1°			SCALE	1/1
									APPD	

**EVERTRON**  DIM MM SIZE A4

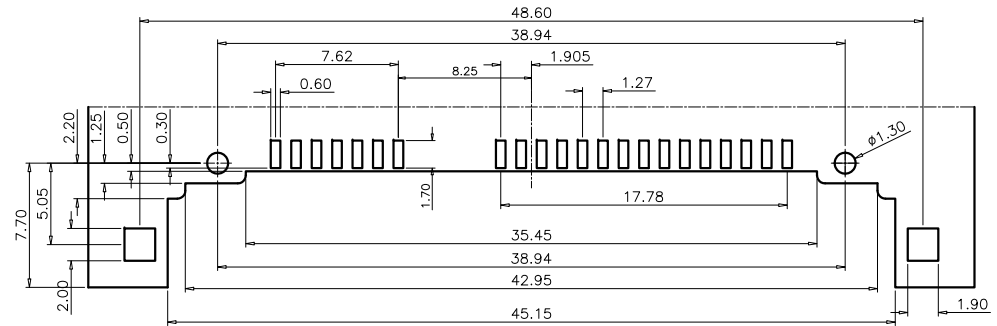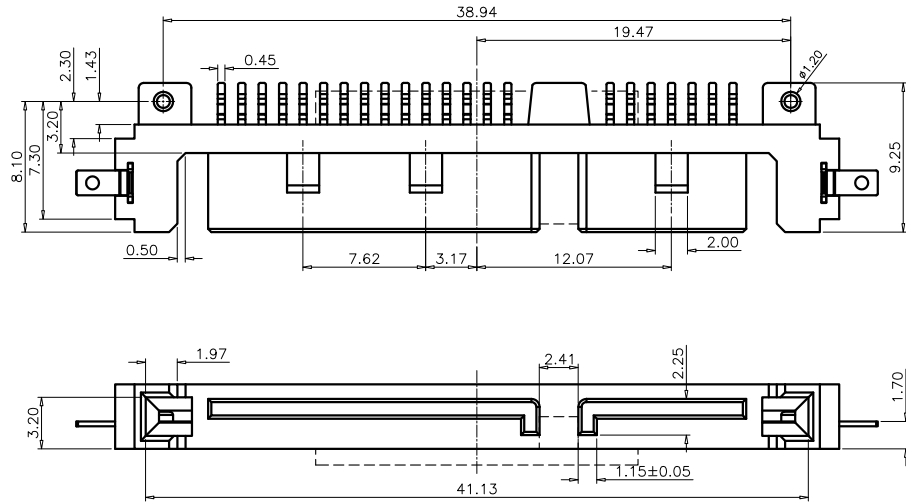





RECOMMENDED P.C. B LAYOUT  
THICKNESS=1.0mm

TABLE 1

ET-SATA-22L-763	GOLD FLASH	LCP BLACK	
ET-SATA-22L-764	15 U" GOLD	LCP BLACK	
ET-SATA-22L-765	30 U" GOLD	LCP BLACK	
PART NO.	PLATED	PLASTIC&COLOR	NOTE

NOTE:

- MATERIAL:  
HOUSING:HIGH TEMPERATURE THERMOPLASTIC,UL94V-0  
COVER:HIGH TEMPERATURE THERMOPLASTIC,UL94V-0  
TERMINAL:COPPER ALLOY,THICKNESS = 0.25 mm  
FORLOCK:COPPER ALLOY,THICKNESS = 0.30 mm
- PLATING:  
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE  
SOLDER TAIL:75u"MIN TIN 50u" MIN NICKEL UNDERPLATE  
GOLD SPECIFICATION:SEE TABLE,
- ELECTRONICAL SPECIFICATION:  
CURRENT RATING:1.5 AMPERE PER CONTACT  
CONTACT RESISTANCE:30 MILLIOHMS MAX.  
INSULATION RESISTANCE:1000 MEGOHMS MIN.  
DIELECTRIC WITHSTANDING VOLTAGE:500 VDC.  
OPERATING TEMPERATURE:-20C~+85C

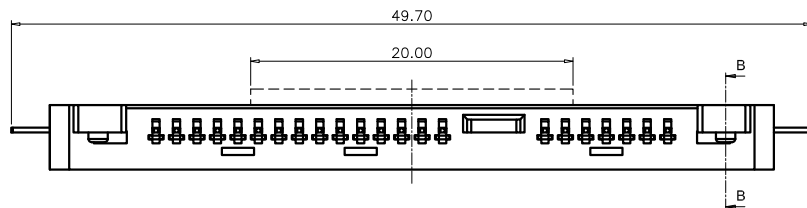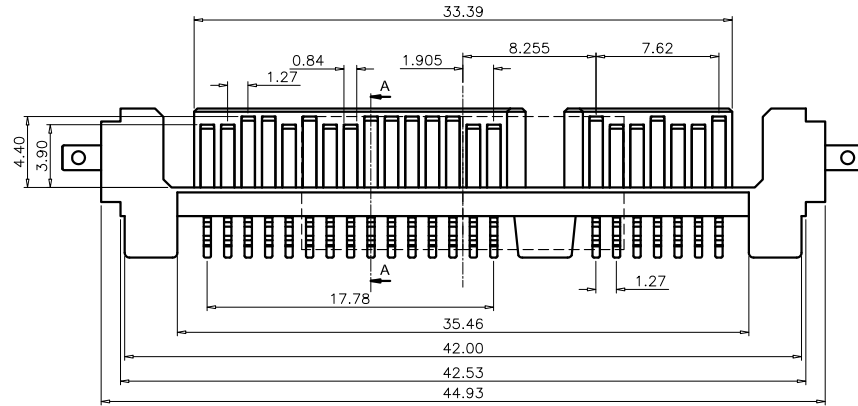

DIMENSION ARE MILLIMETERS  
TOLERANCES ARE :  
DECIMALS  
.X i0 0.30  
.XX i0 0.25  
ANGLE:  
X ± 3°

APPROVALS		DATE
DRAWN	GARY	12/03/08
CHECKED		
APPROVALS		

EVERTRON

TITLE: SATA 22P 公頭沉板式

SIZE	SCALE :	DRAWING NO.	REV.
mm	1 : 1	ET-SATA-22L-XXX	A0
ID NO.	XXXXXXXXXX	SHEET 1 OF 1	

